


DIAMOND PLATED SAW BLADES

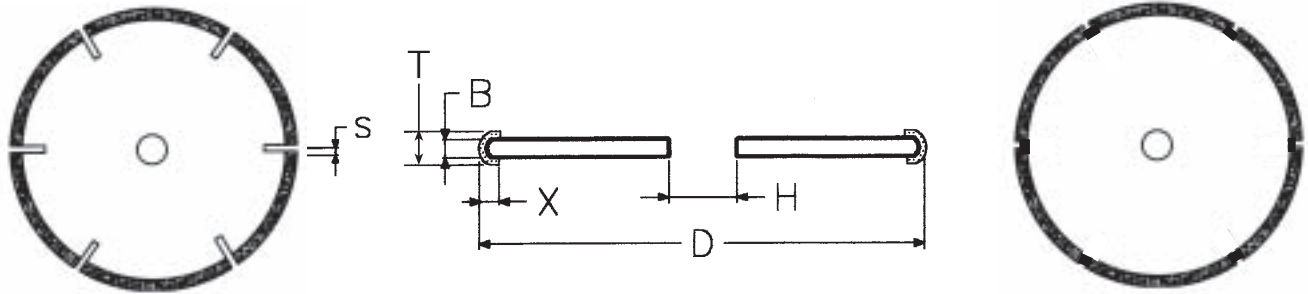

CATALOG NUMBER	DIAMETER	STANDARD BLANK THICKNESS	HOLE
SB1	1	.050	Specify
SB1 ^{1/2}	1 ^{1/2}	.050	
SB2	2	.050	
SB2 ^{1/2}	2 ^{1/2}	.050	
SB3	3	.050	
SB3 ^{1/2}	3 ^{1/2}	.050	
SB4	4	.050	
SB5	5	.050	
SB6	6	.095	
SB7	7	.095	
SB8	8	.095	
SB10	10	.095	
SB12	12	.120	
SB14	14	.120	
SB16	16	.134	
SB18	18	.134	
SB20	20	.165	

Other Standard Blank Thickness Stocked

1" to 4" OD	.031
	.062
5 to 10	.065
	.083
	.095
	.109
	.120
	.134
12	.095
	.109
	.120
	.134
14 to 16	.109
	.120
	.134
18	.120
	.134
	.148
	.165
20	.134
	.148
	.165

*Diameters above 20" available upon request.

HOW TO ORDER

SB 4 U x .050 x 3/4 40-50
Catalog No. U=Unslotted
S=Slotted Blank Thickness Arbor Hole Grit Size

- DIAMETERS:** CDT can manufacture any size up to 48".
- BLANK THICKNESS:** CDT stocks many sizes. Other sizes can be ground to your needs.
- ARBOR HOLE:** Any
- GRIT SIZE:** Any 30-40 and 40-50 are standard. 20-30 through 325-400 are also available.
- SLOTS:** 1/32 - 1/16 - 3/32 - 1/8 - 3/16 "U" slots are used from 3" OD and up. Slots are sized according to the diameter of blade. Any size can be slotted.
- RIBS:** Diamond plated ribs are available for an additional charge to help side cutting and blank wear.
- TOLERANCE:** Special high tolerance can be held. Please inquire.
- CUTTING EDGE:** Round edge is standard. Square edge available.
- THICKNESS OF CUT:** Grit size plus blank thickness can be supplied to maintain any cut thickness.