


DIAMOND PLATED MOUNTED SAWS

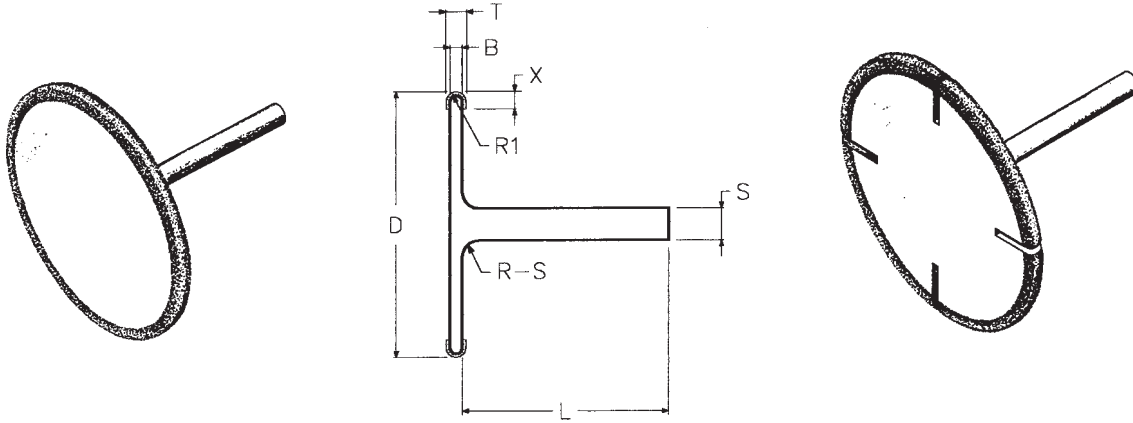

CATALOG NUMBER	DIAMETER	BLANK THICKNESS	SHANK Diameter x Length
MS 3/4	3/4"	050	1/4 x 2 1/2
MS 1	1"	050	1/4 x 2 1/2
MS 1 1/4	1 1/2	062	1/4 x 2 1/2
MS 1 1/2	1 1/2	062	1/4 x 2 1/2
MS 2	2"	062	1/4 x 2 1/2
MS 2 1/2	2 1/2	062	1/4 x 2 1/2
MS 3	3"	062	3/8 x 2 1/2
MS 3 1/2	3 1/2	062	3/8 x 2 1/2
MS 4	4"	070	1/2 x 2 1/2
MS 4 1/2	4 1/2	085	1/2 x 2 1/2
MS 5	5"	085	1/2 x 2 1/2

HOW TO ORDER

MS2 U x 1/4 x 2 1/2 40-50
Catalog No. U=Unslotted
S=Slotted Shank Size Grit Size

- DIAMETERS:** CDT can manufacture any size you require.
- BLANK THICKNESS:** Other sizes can be supplied
- SHANK:** Any diameter and length can be manufactured. For safety reasons the above listed shank diameters are always recommended.
- TOLERANCE:** Special high tolerance can be held, please inquire.
- GRIT SIZE:** Any 30-40 and 40-60 are standard. 20-30 through 325-400 are available.
- SLOTS:** 1/32 - 1/16 - 3/32 - 1/8 "U" slots are used slots are size according to the diameter of blade.
- RIBS:** Diamond plated ribs are available to help side cutting and blank wear for an additional charge.
- CUTTING EDGE:** Round edges are standard. Square edges available.
- THICKNESS OF CUT:** Grit size plus blank thickness can be supplied to maintain any cut thickness.